



# MISTRAL

SCONCES WALL

ADA

COMPLIANT

Location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted **ADA-compliant** sconce featuring open-ended handcrafted glass.

### LAMPING

**Standard:** 2x 100W A19 120V incandescent, suitable for dimming.

**CFL:** 26W 4-Pin CFL with non-dimming electronic ballast. 120V, lamp not included.

**T5 CFL:** 36W Twin T5 CFL with non-dimming electronic ballast.

**GU24 CFL:** Self-ballasted GU24 lampholders. 26W max, 120V, lamp not included.

**LED:** 10W LED Replaceable source, 120V, dimmable, included.

### DIFFUSER

Diffuser shall be handcrafted glass of Opal Matte decor.

### CONSTRUCTION

Glass is secured to the backplate by decorative thumbscrews. Rectangular backplate (nominal 4" W x 17.25" H) shall be constructed of steel, powder-coated white.

### METAL FINISH


Decorative metal accents shall be in various finish options.

### MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 11.375" above the outlet box centerline.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

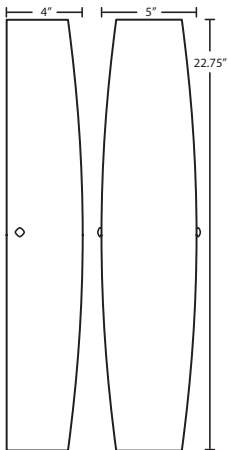

### Project Information:



MISTRAL SHOWN IN OPAL MATTE (711207)

### LED SCONCES:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- Frosted acrylic diffuser
- 800 lumens
- CCT: 2800° Kelvin
- CRI: 80+

### ORDERING:

FIXTURE/DECOR	LAMP OPTIONS	METAL FINISH	OPTIONS
711207 Opal Matte	(blank) 2x 100W A19 Incan H2 2x 26W Quad 120V Q2 2x 26W Quad 277V 136T5 1x 36W Twin T5 120/277V GU24 2x 26W GU24 120V LED 2x 10W LED 120V, dimmable	BK Black BR Bronze PN Polished Nickel SN Satin Nickel WH White	LW Low Wattage labeling

**Ex. 711207-SN**  
Mistral Wall Sconce w/ Opal Matte Glass,  
Satin Nickel Finish

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 10/14