



# TAMBURO 8

SCONCES WALL



location:  
**DAMP**

## SPECIFICATIONS:

### DESCRIPTION

Wall-mounted **ADA-compliant** sconce featuring open-ended handcrafted glass.

### LAMPING

**Standard:** 75W A19 120V incandescent, suitable for dimming.

**CFL:** 18W 4-Pin CFL with non-dimming electronic ballast. 120V, lamp not included.

**GU24 CFL:** Self-ballasted GU24 lampholders. 18W max, 120V, lamp not included.

**LED:** 10W LED Replaceable source, 120V, dimmable, included.

### DIFFUSER

Diffuser shall be handcrafted glass of various decors.

### CONSTRUCTION

Glass is secured to the backplate by braided wire. Rectangular backplate (nominal 4"W x 6.5" H) shall be constructed of steel, powder-coated white.

### METAL FINISH


Decorative metal accents shall be in various finish options.

### MOUNTING


Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping. Top of glass is approximately 6.125" above the outlet box centerline.

### LABELS

UL or ETL Listed. Suitable for Damp Locations (interior use only).

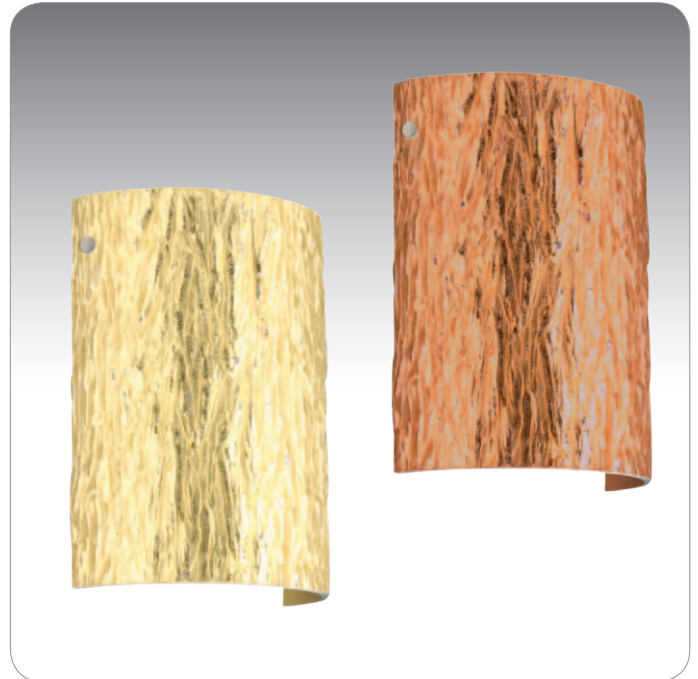

TAMBURO 8 SHOWN IN STONE GOLD FOIL (7090GF) & STONE COPPER FOIL (7090CF)



7090OS  
OPAL STONE

7090SF  
STONE SILVER FOIL

7089BD  
BLACK DAMASK



**For ordering information, see next page**

All dimensions provided are nominal.  
Allowance must be made for dimensional tolerance in handcrafted glasses.

**REV 10/14**



TAMBURO 8

SCONCES WALL

ORDERING:

FIXTURE/DECOR	LAMP OPTIONS	METAL FINISH	OPTIONS
7089BD Black Damask	(blank) 75W A19 Incan	BK Black	LW Low Wattage
7090CF Stone Copper Foil	E1 18W Quad 120V	BR Bronze	labeling
7090GF Stone Gold Foil	N1 18W Quad 277V	PN Polished Nickel	
7090OS Opal Stone	GU24 18W GU24 120V	SN Satin Nickel	
7090SF Stone Silver Foil	LED 10W LED 120V, dimmable	WH White	

**Ex. 7090OS-SN**  
 Tamburo 8 Wall Sconce w/ Opal Stone Glass,  
 Satin Nickel Finish

LED SCONCES:

- Internal driver integrated in the lamp, GU24 base
- Total power of only 10 watts
- Dimmable with a standard dimmer
- Rated life: 30,000 hours
- Frosted acrylic diffuser
- 800 lumens
- CCT: 2800° Kelvin
- CRI: 80+

Project Information: